


CMSX Streamer Cable Management System

The **TAP** Cable Management System (CMSX) is a simple yet powerful Windows® based Graphical User Interface (GUI), for controlling a single seismic streamer. It is ideally suited for high-resolution and 2-D installations.

It is fully compatible with the Digicourse® model 272 modem, model 293 DAU, and 5010 and 5011 birds.

The program is fully integrated, with calibration and check out included as standard.

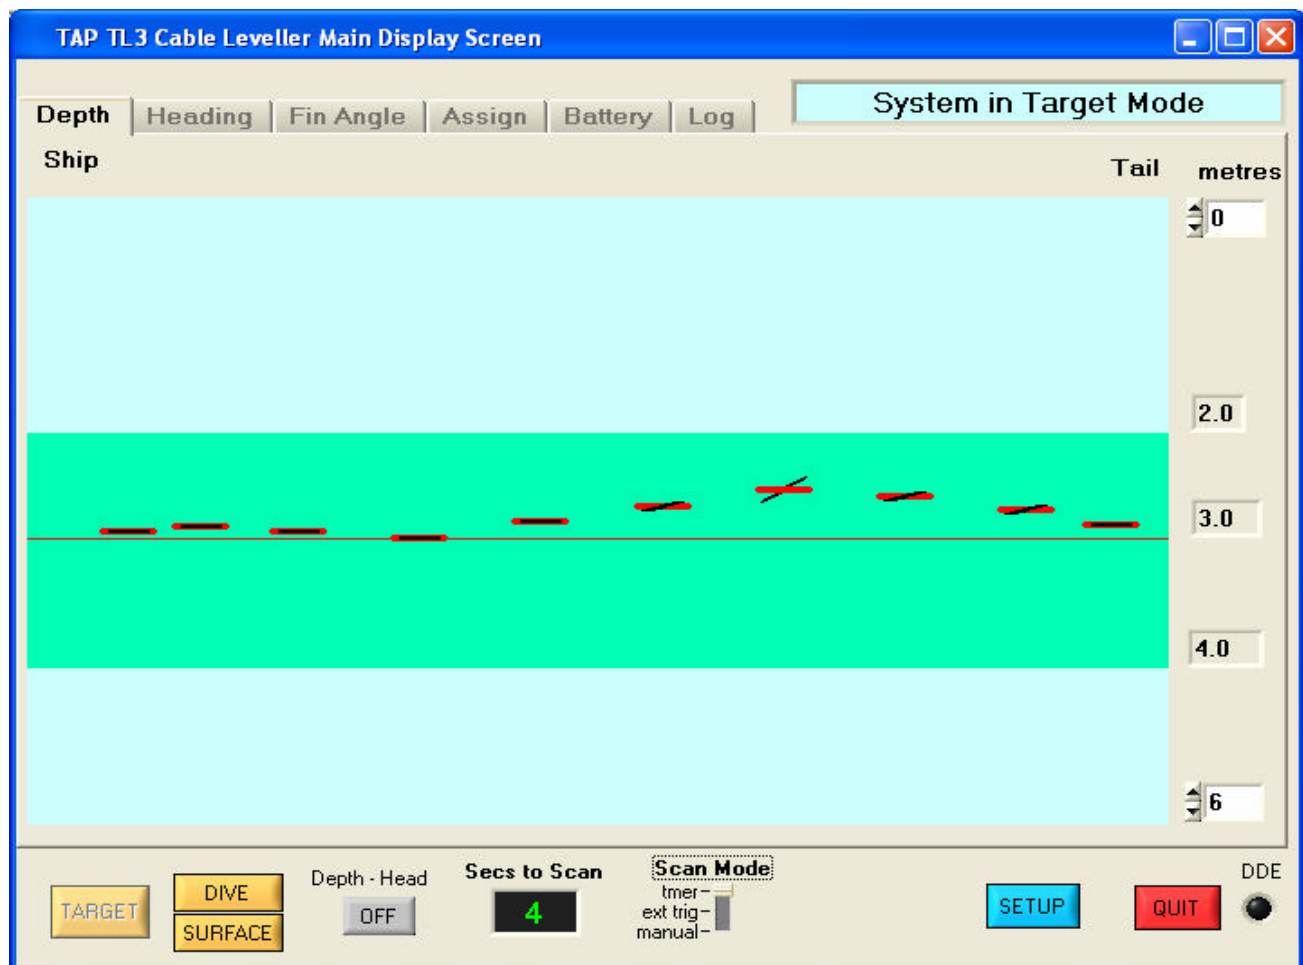

Depth Display Screen (simulated data)

System requirements: Any PC running Windows® XP, with a spare USB port and two RS232 serial ports (or a second USB port).

Capacity: up to 32 birds/compasses on a single streamer.

TL3 option, (CMS3)

This program is optimized to integrate with the TAP TL3 Recording System. It installs on the TL3 PC controller, with combined logging and triggering. It runs in its own window, saving space and hardware.

Capacity: up to 16 birds/compasses on a single streamer.

